



# FORESTRY

## CATALOGUE







## Table of Contents

NLS	NORDIC STUDDED DOUBLE DIAMOND NETLINK	1
NLTS	NORDIC STUDDED TRIPLE DIAMOND NETLINK	1
SDU/DHU	NORDIC SINGLE & 1.5 DIAMOND TOP MOUNT U-GRIP NETLINK	2
DDU	NORIC DOUBLE DIAMOND TOP MOUNT U-GRIP NETLINK	3
NLU	NORDIC DOUBLE DIAMOND U-GRIP NETLINK	4
NLTU	NORDIC TRIPLE DIAMOND U-GRIP NETLINK	4
TDU	NORDIC TRIPLE DIAMOND TOP MOUNT U-GRIP NETLINK	5
NTFF	NORDIC NETLINK FORGED FORESTRY CHAIN	6
NLTFFP/NLFFPE	NORDIC AMOUR FORGED FORESTRY PROTECTION CHAIN	7
RAF	NORDIC FLOATING RING CHAIN	8
RAT	NORDIC FLOATING RING CHAIN	9
RAM	NORDIC MULTI RING ALLOY CHAIN	10
FORESTRY PARTS		11-12

**(613) 822-2154**  
[sales@brucesales.com](mailto:sales@brucesales.com)  
[www.brucesales.com](http://www.brucesales.com)



Our net link chain uses weld on studs providing grip and durability in icy or rocky conditions. Available in 16mm, 18mm and 20mm material sizes and double or triple diamond configurations.

## NORDIC STUDDED DOUBLE DIAMOND NETLINK

TIRE SIZES	PART #	MATERIAL SIZES	WEIGHT
23.1x26	NLS231-16	16mm (5/8")	405 Kg (849 lbs)
	NLS231-18	18mm (3/4")	499 Kg (1100 lbs)
24.5x32	NLS245-16	16mm (5/8")	463 Kg (1020 lbs)
	NLS245-18	18mm (3/4")	584 Kg (1287 lbs)
30.5x32	NLS305-18	18mm (3/4")	662 Kg (1460 lbs)
	NLS305-20	20mm (13/16")	858 Kg (1892 lbs)
35.5x32	NLS355-18	18mm (3/4")	844 Kg (1860 lbs)
	NLS355-20	20mm (13/16")	911 Kg (2008 lbs)
73x44x32	NLS730-18	18mm (3/4")	763 Kg (1682 lbs)




## NORDIC STUDDED TRIPLE DIAMOND NETLINK

TIRE SIZES	PART #	MATERIAL SIZES	WEIGHT
30.5x32	NLTS305-18	18mm (3/4")	878 Kg (1936 lbs)
	NLTS305-20	20mm (13/16")	882 Kg (1944 lbs)
35.5x32	NLTS355-18	18mm (3/4")	967 Kg (2131 lbs)
	NLTS355-20	20mm (13/16")	1108 Kg (2442 lbs)
73x44x32	NLTS730-16	16mm (5/8")	724 Kg (1596 lbs)
	NLTS730-18	18mm (3/4")	980 Kg (2160 lbs)
	NLTS730-20	20mm (13/16")	1111 Kg (2449 lbs)

### ACCESSORIES




**HD TIGHTENER**  
screw actuated  
chain tightening tool  
2506HD





## NORDIC SINGLE & 1.5 DIAMOND TOP MOUNT U-GRIP NETLINK

These chains offer incredible durability thanks to our unique heat treatment process and large 7/8" material size. The use of top mounted U-Studs maximizes traction and prevents the chain from rolling over. Both of these chains are great options for operators looking for incredible traction and wear life while not needing the coverage of a double or triple diamond chain.

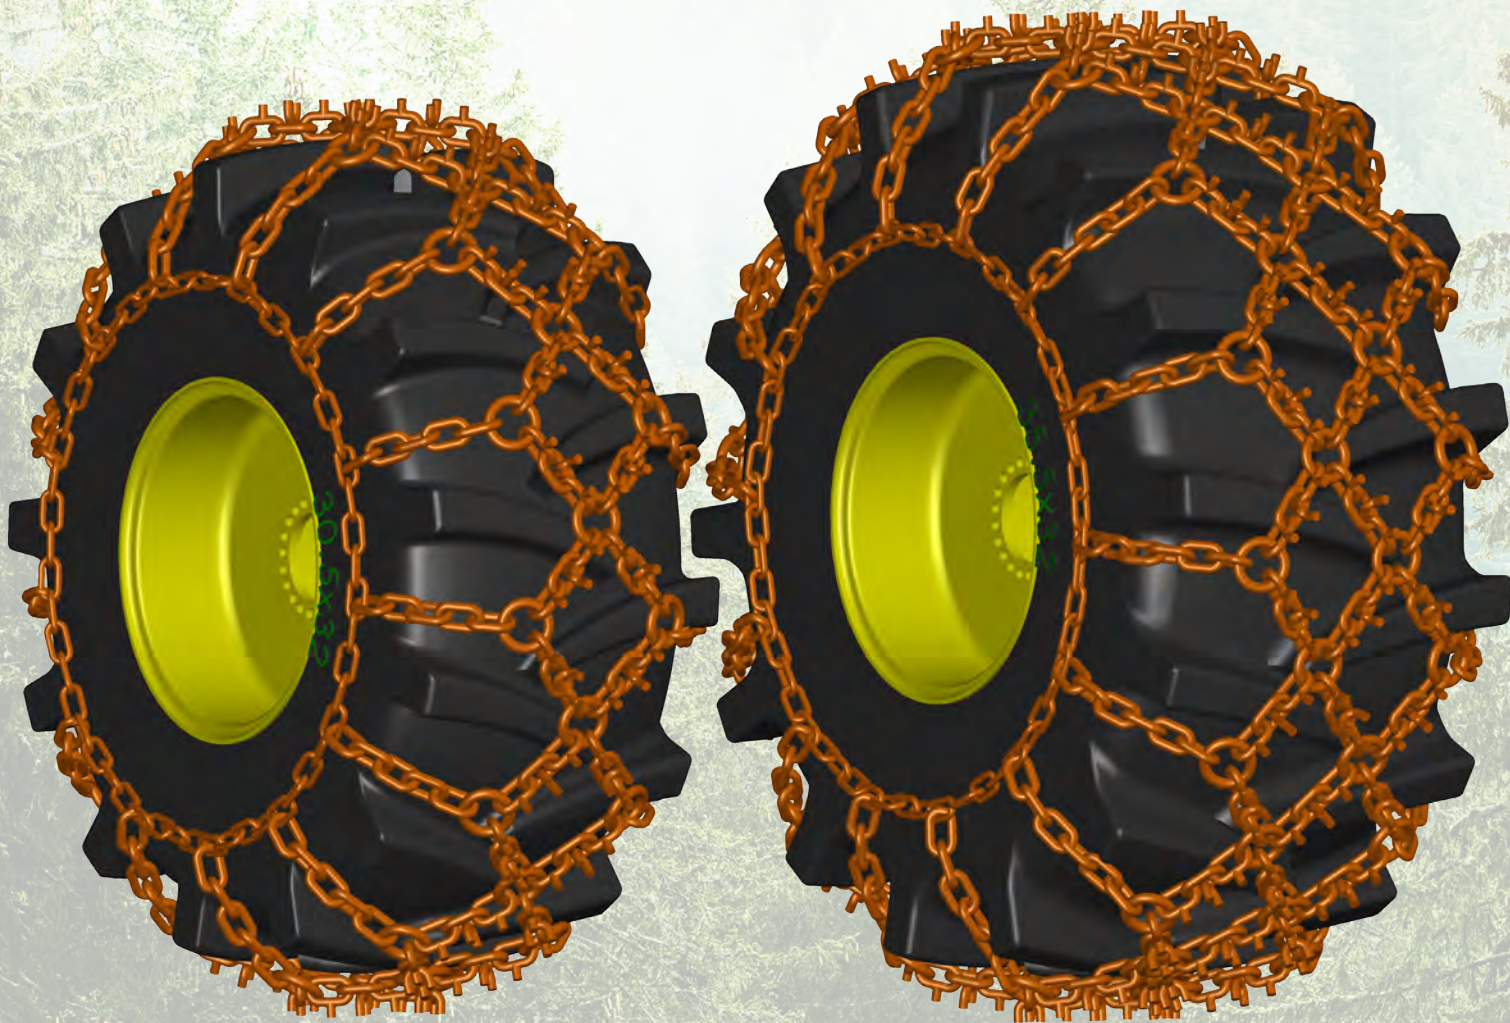

### ACCESSORIES



**HD TIGHTENER**  
screw actuated  
chain tightening tool  
2506HD



TIRE SIZE	NORDIC SINGLE DIAMOND TOP MOUNT U-GRIP NETLINK SDU	NORDIC 1.5 DIAMOND TOP MOUNT U-GRIP NETLINK DHU	MATERIAL SIZE	WEIGHT
	PART #	PART #		
30.5x32	SDU3053278		22mm (7/8")	734 Kg (1688 lbs)
35.5x32		DHU3553278	22mm (7/8")	1042 Kg (2297 lbs)



# NORDIC DOUBLE DIAMOND TOP MOUNT U-GRIP NETLINK

Top mounted U studs prevent chain from rolling and ensures continual traction. Available in 19mm material size with 20mm U studs. The DDU is available in double diamond configuration.

DESIGNED & ENGINEERED  
by QCCANADA




TIRE SIZE	NORDIC DOUBLE DIAMOND TOP MOUNT U-GRIP		
	PART #	MATERIAL SIZE	WEIGHT
30.5x32	DDU3053234	19mm (3/4")	668 Kg (1473 lbs)
35.5x32	DDU3553234	19mm (3/4")	742 Kg (1636 lbs)

## ACCESSORIES



**HD TIGHTENER**  
screw actuated  
chain tightening tool  
2506HD

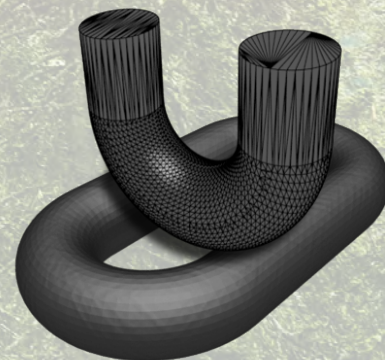



The under mount U-Stud provides the ultimate in stability and traction. The NLU is built for the most demanding forestry environments. Available in 16mm, 18mm and 20mm diameter and double or triple diamond configurations.

## NORDIC DOUBLE DIAMOND U-GRIP NETLINK

TIRE SIZES	PART #	MATERIAL SIZES	WEIGHT
23.1x26	NLU231-16	16mm (5/8")	390 Kg (860 lbs)
30.5x32	NLU305-18	18mm (3/4")	676 Kg (1490 lbs)
	NLU305-20	20mm (13/16")	769 Kg (1696 lbs)
35.5x32	NLU355-18	18mm (3/4")	859 Kg (1894 lbs)
	NLU355-20	20mm (13/16")	913 Kg (2013 lbs)
73x44x32	NLU730-18	18mm (3/4")	777 Kg (1712 lbs)



**NORDIC**  
tire chains  
engineered in Canada


## NORDIC TRIPLE DIAMOND U-GRIP NETLINK

TIRE SIZES	PART #	MATERIAL SIZES	WEIGHT
35.5x32	NLTU355-20	20mm (13/16")	1265 Kg (2789 lbs)
73x44x32	NLTU730-16	16mm (13/16")	785 Kg (1731 lbs)

### ACCESSORIES



**HD TIGHTENER**  
screw actuated  
chain tightening tool  
2506HD


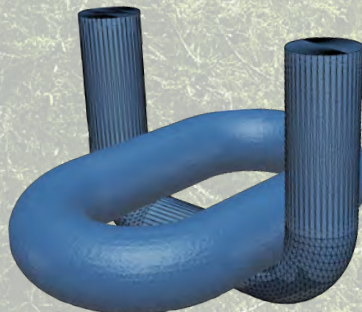


**NORDIC**  
tire chains  
engineered in Canada



## NORDIC TRIPLE DIAMOND TOP MOUNT U-GRIP NETLINK

Our TDU was designed with forwarder, harvester and skidder floatation tires in mind. The TDU chain uses top mounted U studs in a tight triple diamond design to ensure continual traction and tire coverage. The design incorporates a tensioning chain to ensure a secure fit regardless of tire make or levels of wear. Side chain design also offers additional protection for tire side walls. The TDU is available in 16mm material size in a triple diamond configuration. Tension chain only available with metric sized tires.

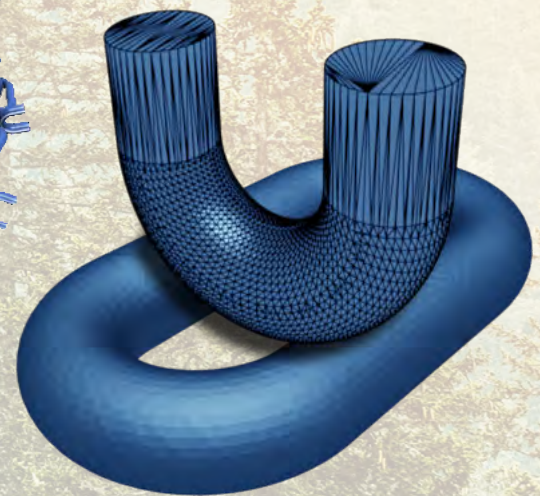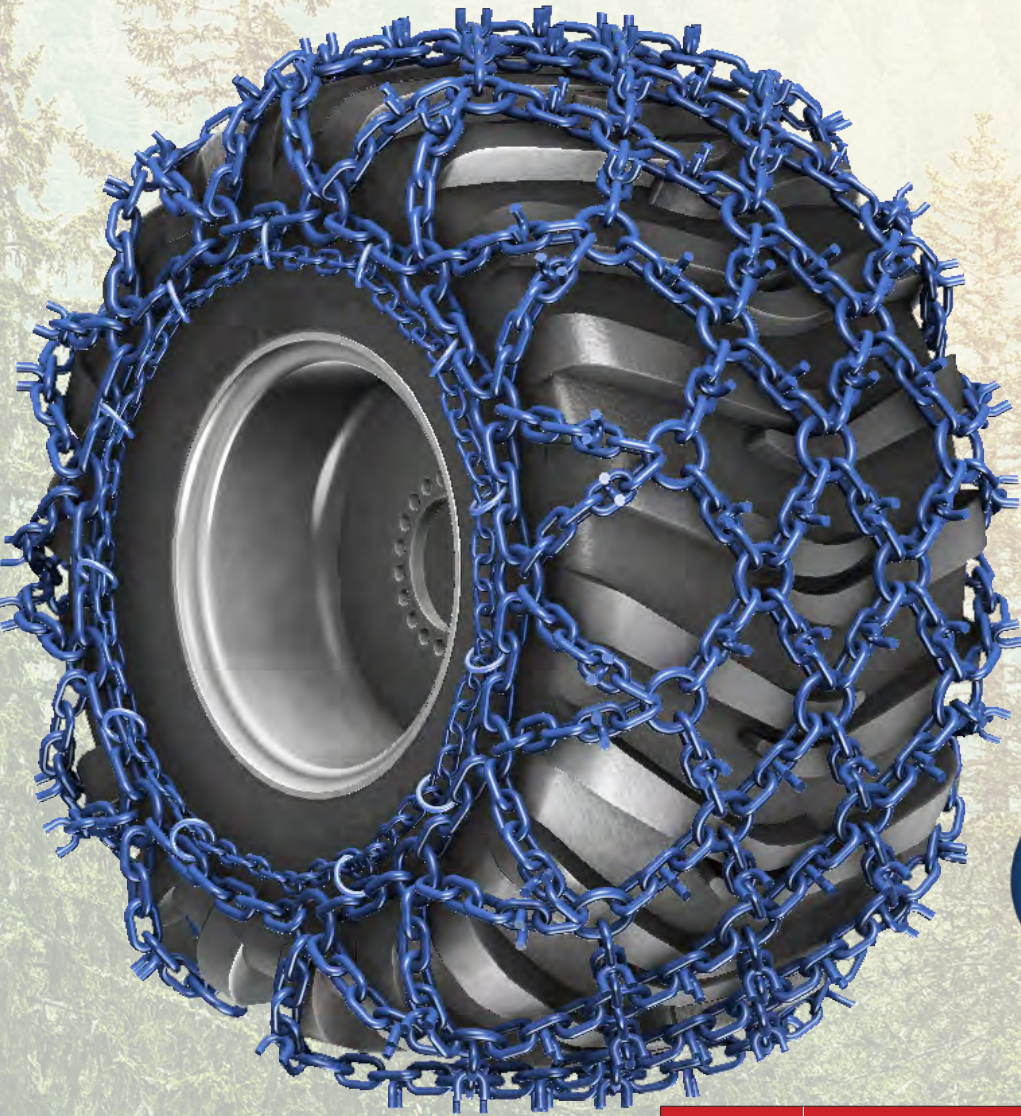

### ACCESSORIES



**HD TIGHTENER**  
screw actuated  
chain tightening tool  
2506HD


TIRE SIZE	NORDIC TRIPLE DIAMOND TOP MOUNT U-GRIP NETLINK <i>FORWARDER/SKIDDER FLOATATION USE</i>		
	PART #	MATERIAL SIZE	WEIGHT
710/45x26.5	TDU7104558	16mm (5/8")	493Kg (1084 lbs)
750/55x26.5	TDU7505558	16mm (5/8")	563Kg (1289 lbs)
780/50x28.5	TDU7805058	16mm (5/8")	603Kg (1328 lbs)
73x44x32	TDU73443258	16mm (5/8")	766 Kg (1689 lbs)
76x50x32	TDU76503258	16mm (5/8")	860 Kg (1896 lbs)



## NORDIC NETLINK FORGED FORESTRY CHAIN

Our most aggressive and longest lasting skidder chain, utilizing forged studs and 22mm connecting rings, the forged forestry chain is built for the world's most demanding forestry environments.

The Nordic forged forestry chain is in a class of its own, providing unsurpassed durability and traction.

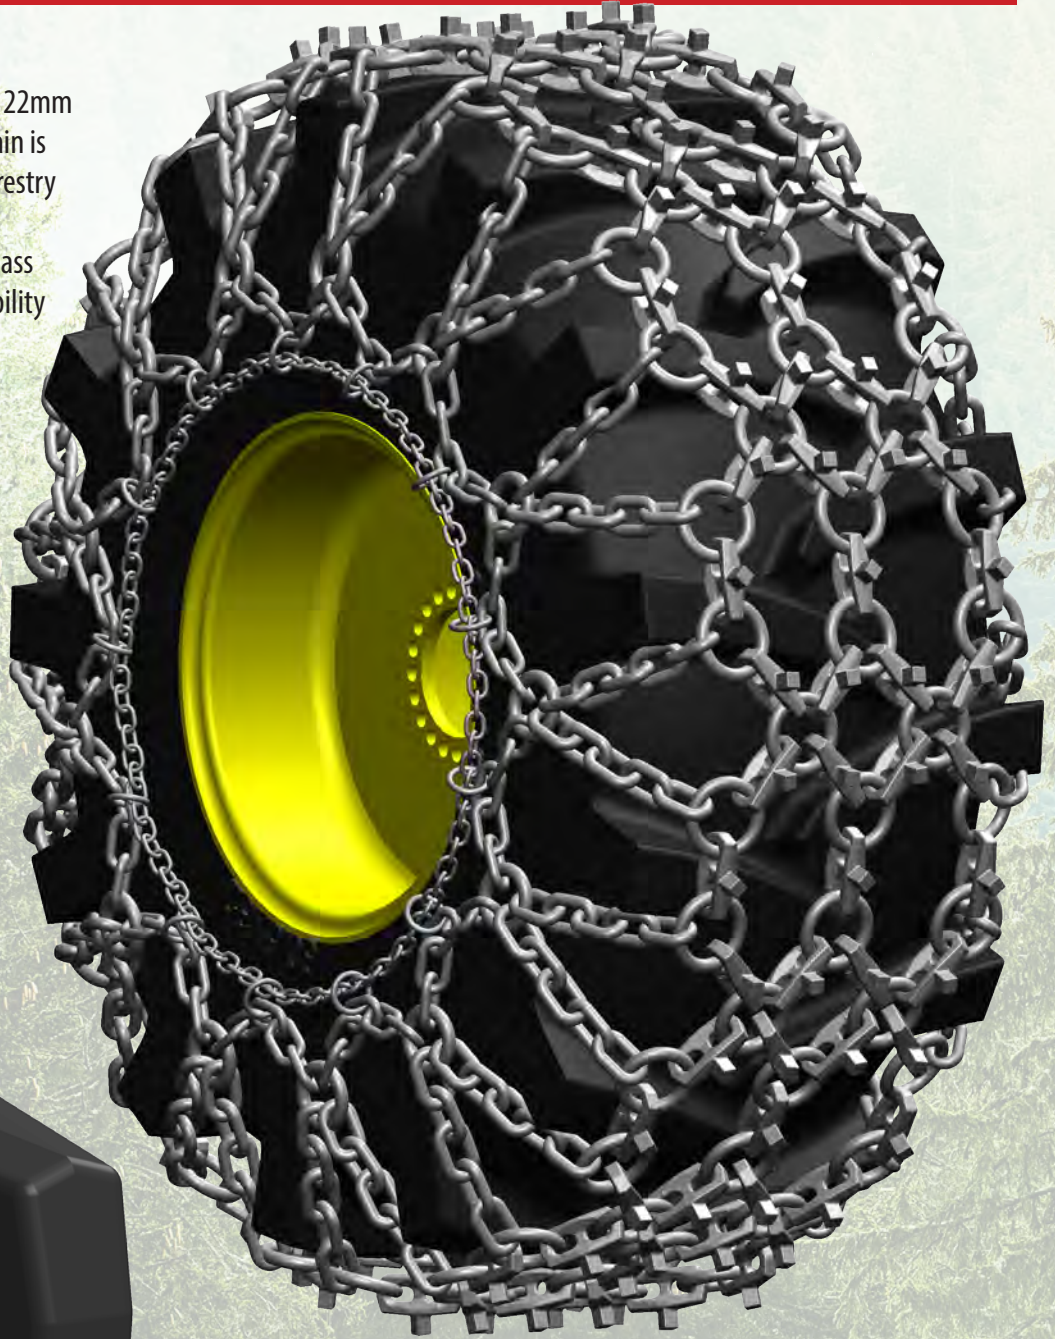

### SINGLE STUD

Its unique patent pending design will not allow snow and mud to accumulate. Traction will never be compromised.

TIRE SIZE	NORDIC NETLINK FORGED FORESTRY CHAIN		
	PART #	MATERIAL SIZE	WEIGHT
24.5x32	NTFF245-22	22mm	909 Kg (2004 lbs)
30.5x32	NTFF305-22	22mm	993 Kg (2189 lbs)
35.5X32	NTFF355-22	22mm	1136 Kg (2504 lbs)




# THE NORDIC **ARMOUR** FORGED FORESTRY PROTECTION CHAIN

Tires represent the most expensive maintenance costs for forestry skidders. The Nordic Armour forged forestry protection chain increases tire life by protecting the tires surface from excessive wear, punctures and cuts. The Nordic Armour is available in either a single or triple stud depending on operational needs.

## TRIPLE STUD

Patent pending design used for traction with minimal ground disturbance.

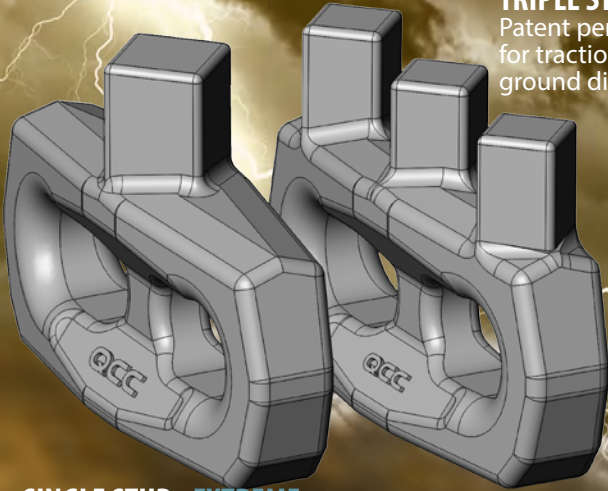

## SINGLE STUD - EXTREME

Used for traction in the most extreme environments. Its unique patent pending design will not allow snow and mud to accumulate. Traction will never be compromised.



A PRODUCT OF

**NORDIC**  
tire chains  
engineered in Canada

SINGLE STUD - EXTREME	TIRE SIZES	PART #	MATERIAL SIZE	WEIGHT
	30.5x32	NLTFFPE305-22	22mm (7/8")	1267 Kg (2793 lbs)
	35.5x32	NLTFFPE355-22	22mm (7/8")	1399 Kg (3084 lbs)
	73x44x32	NLQFFPE730-22	22mm (7/8")	1690 Kg (3726 lbs)
TRIPLE STUD	TIRE SIZES	PART #	MATERIAL SIZE	WEIGHT
	30.5x32	NLTFFP305-22	22mm (7/8")	1352 Kg (2981 lbs)
	35.5x32	NLTFFP355-22	22mm (7/8")	1449 Kg (3194 lbs)
	73x44x32	NLQFFP730-22	22mm (7/8")	1779 Kg (3922 lbs)



# NORDIC FLOATING RING CHAIN

Rings are fully floating to help shed mud and debris. 20mm connecting links / 28mm rings.



## NORDIC

### tire chains

engineered in Canada

- Grouser made of fully forged steel.



TIRE SIZES	PART #	RING SIZE	WEIGHT
23.1x26	RAF231-16	28mm (1 1/8")	395 Kg (871 lbs)
24.5x32	RAF245-16	28mm (1 1/8")	516 Kg (1137 lbs)
30.5x32	RAF305-16	28mm (1 1/8")	539 Kg (1188 lbs)
30.5x32	RAF305-19	28mm (1 1/8")	570 Kg (1256 lbs)
35.5x32	RAF355-19	28mm (1 1/8")	636 Kg (1402 lbs)
73x44x32	RAF730-19	28mm (1 1/8")	628 Kg (1384 lbs)

#### ACCESSORIES



**HD TIGHTENER**  
screw actuated  
chain tightening tool  
2506HD



## NORDIC TIGHT RING ALLOY CHAIN

Fixed ring chain with rings spaced closer together than standard ring chain for better continual traction. 20mm connecting links / 28mm rings.



- Grouser made of fully forged steel.



TIRE SIZES	PART #	RING SIZE	WEIGHT
30.5x32	RAT305-19	28mm (1 1/8")	665 Kg (1466 lbs)
	RAT305-25	38mm (1 1/2")	750 Kg (1654 lbs)
35.5x32	RAT355-19	28mm (1 1/8")	737 Kg (1625 lbs)
	RAT355-25	38mm (1 1/2")	852 Kg (1878 lbs)
73x44x32	RAT730-19	28mm (1 1/8")	725 Kg (1599 lbs)
	RAT730-25	38mm (1 1/2")	831 Kg (1832 lbs)

### ACCESSORIES




**HD TIGHTENER**  
screw actuated  
chain tightening tool  
2506HD



# NORDIC MULTI RING CHAIN

19mm, 22mm, 25mm alloy steel cross patterns. Rings are staggered for more tire coverage and thus improved traction compared to single ring patterns.

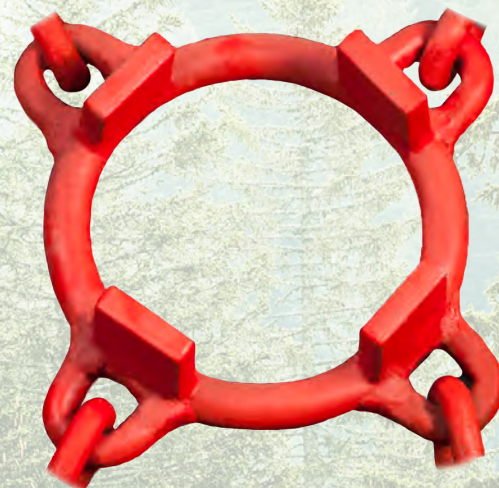

## ACCESSORIES


HD Tightener screw actuated  
chain tightening tool  
**2506HD**



## LINK AND SHACKLE ADJUSTER

We also highly recommend the use of tire chain adjusters for securing your chains on the tires as tight as possible. Doing so will greatly prolong the life of your chains!



**0294 / 0296 / 0298**







BASE PART#	AVAILABLE MATERIAL SIZES	FULL PART #	WEIGHT/PR	ADJUSTER
RAM245	19mm (3/4")	RAM245-19	551 Kg (1215 lbs)	0296
RAM305	22mm (7/8")	RAM305-22	712 Kg (1570 lbs)	
	25mm (13/16")	RAM305-25	844 Kg (1860 lbs)	
RAM355	22mm (7/8")	RAM355-22	776 Kg (1710 lbs)	
RAM730	22mm (7/8")	RAM730-22	829 Kg (1828 lbs)	



## REPAIR RINGS

PART #	PRODUCT	RING WIRE SIZE	INSIDE LENGTH	WEIGHT	PCS
RING18		18mm (3/4")	76mm (3")	.9 Kg (2 lbs)	1
RING22		22mm (7/8")	76mm (3")	1.6 Kg (3.5 lbs)	1

## RATED ANCHOR SHACKLES

	PRODUCT	SIZE		WEIGHT	PCS
PSC160		16mm (5/8")		.9 Kg (2 lbs)	1
PCS190		19mm (3/4")		.9 Kg (2 lbs)	1
SPAS160IM		16mm (5/8")		.7 Kg (1.5 lbs)	1
SPAS190IM		19mm (3/4")		1 Kg (2.3 lbs)	1



## 2506HD ADJUSTER

Updated design featuring reinforced components and greasable fitting for maximum durability and longevity.



### 2506HD ADJUSTER

Weight	Min Range	Max Range	Socket Size
14lbs/6.4Kg	3.9" / 10cm	15" / 38cm	1"


✱ Max Torque 200ft/lbs



[www.brucesales.com](http://www.brucesales.com)





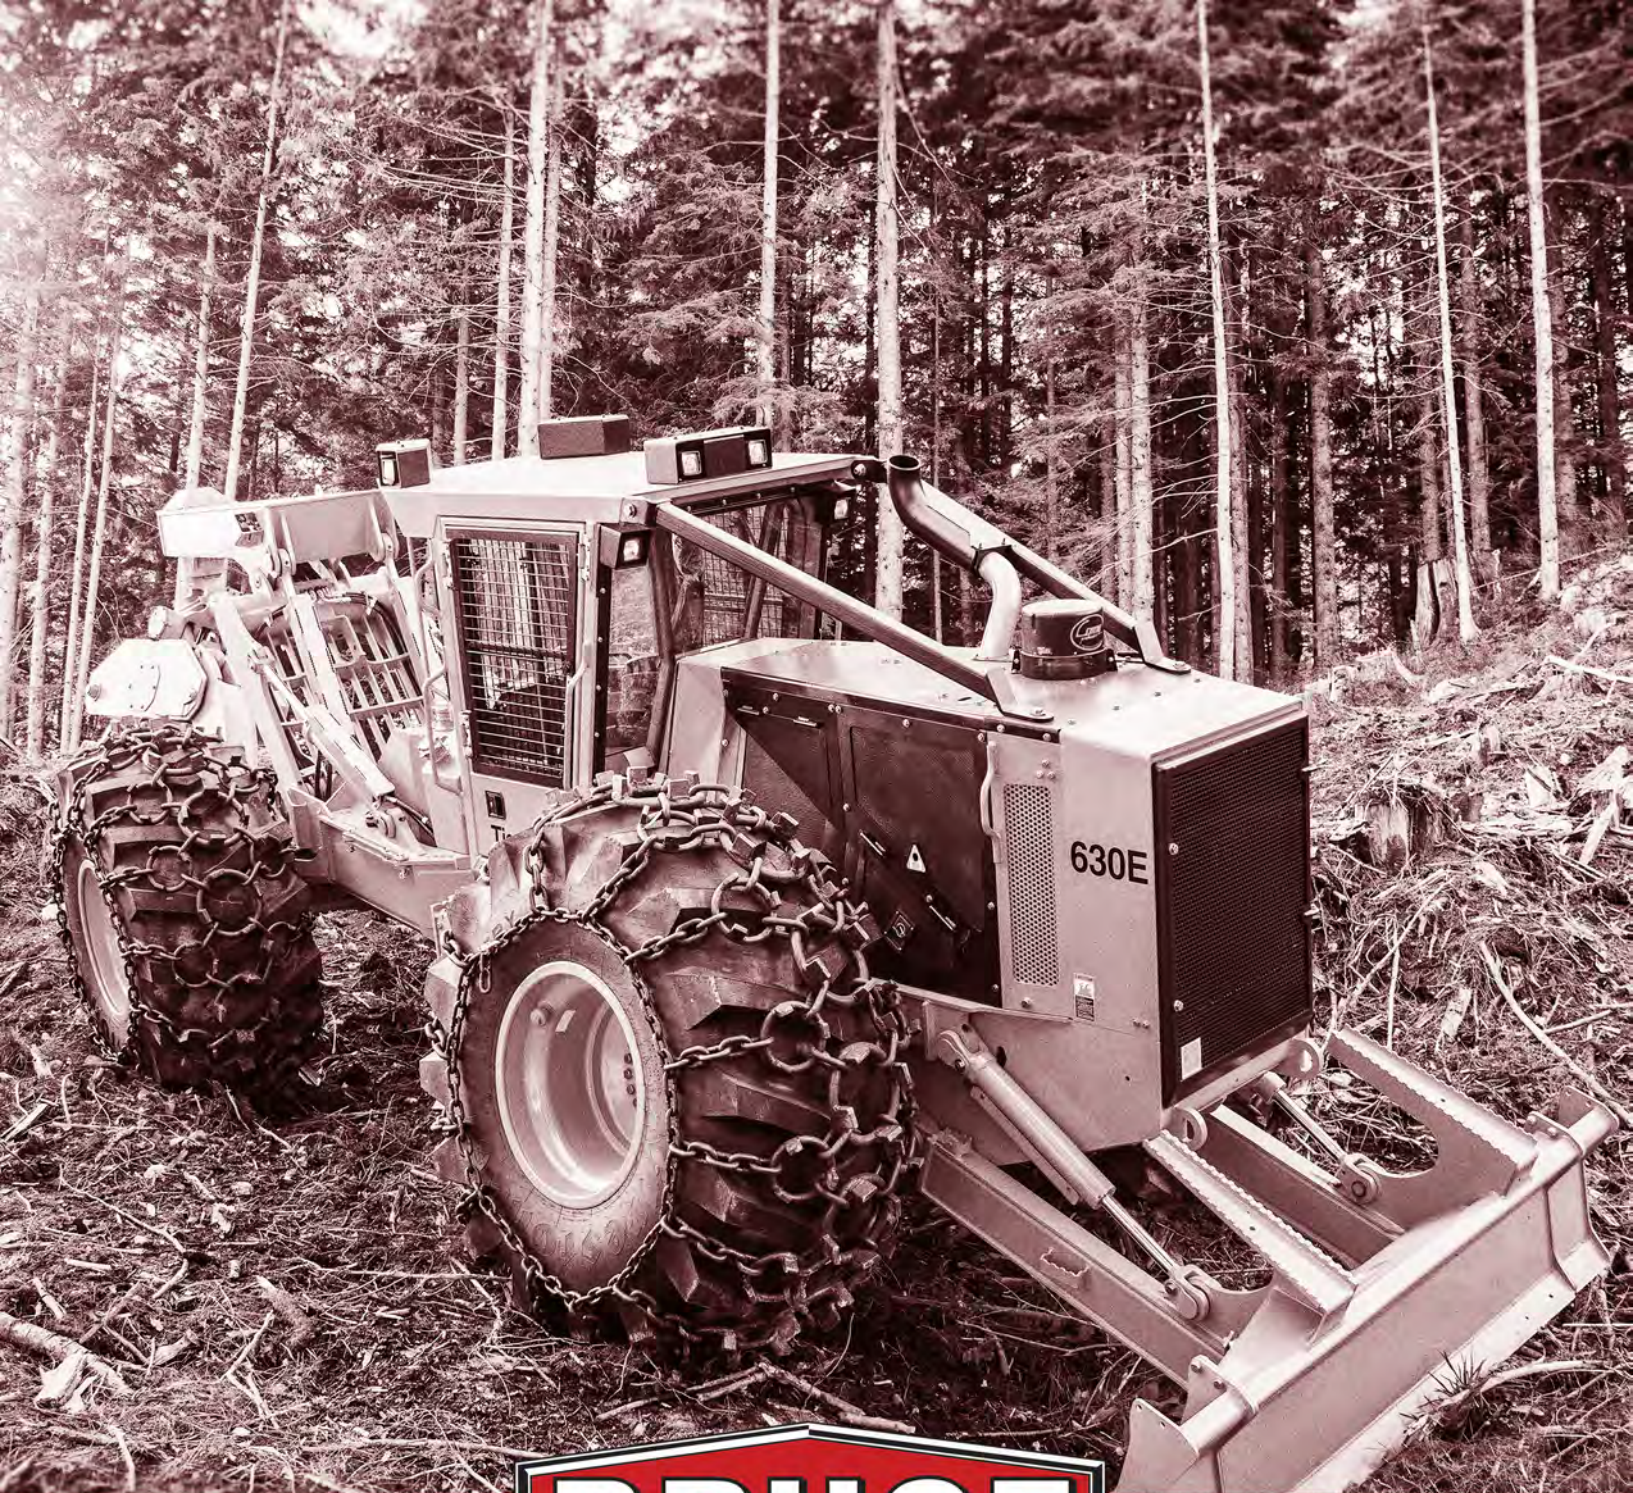

**BRUCE SALES INCORPORATED**  
2588 Del Zotto Ave. Gloucester ON K1T 3V7  
P: (613) 822-2154  
[sales@brucesales.com](mailto:sales@brucesales.com)  
[www.brucesales.com](http://www.brucesales.com)